


KERSTEN®

High Voltage Distributor

DV 206

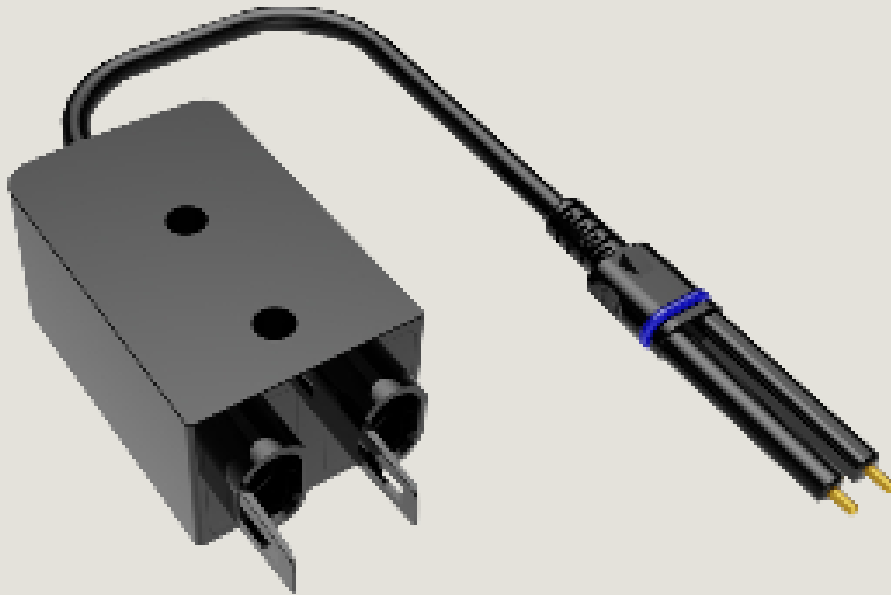

THE PRODUCT

System with flexibility:

The DV 206 high voltage distributor is the little brother of the DV 106, offering you the option of extending your existing discharge system by a further member of the KERSTEN neXt® product family.

BENEFITS

- Passive high voltage distributor
- Additional sockets

CUSTOMER BENEFITS

- Easy to install
- Flexible expansion options
- Plug-in System
- Maintenance free

GENERAL INFORMATION

Output voltage	U_a	kV DC	<+6.0 / >-4.5
Number of high voltage slots			2
Type of connection			neXt® connector
Max. available high voltage cable length		m	120
- Grid up to 2.0m / - Grid from 2.0m		m	0.1 / 0.5

CLIMATE CONDITIONS


Temperature during transport and storage	T	°C / °F	-25 - +85 / -13- +185*
Temperature during operation	T	°C / °F	+5 - +50 / +41- +122**
Relative humidity (non-condensing)	RH	%	<80

DIMENSIONS

L/W/H	mm	80 / 39 / 28
-------	----	--------------

* gem. UL50 Typ B / klasse 3K3 max 70 °C (+158 °F) ** gem. UL50 Typ B / Klasse 3K3 max 40 °C (+104°F)

TECHNICAL DRAWING

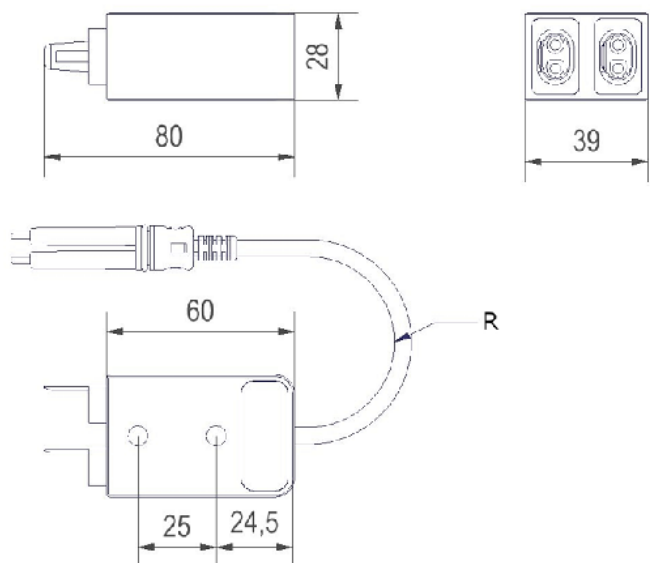

All dimension measurements in mm

KERSTEN ELEKTROSTATIK GMBH

Walter-Knoell-Straße 3
 D-79115 Freiburg | Germany
 T +49 761 47944-0 | F +49 761 47944-99
 info@kersten.de | www.kersten.de

